

1x2 980/1060nm Fused PM Fiber Standard WDM

Specifications

Parameter		Unit	Premium	A grade
Pump Channel		nm	980 ± 5	
Insertion Loss	Max.	dB	0.5	0.7
Polarization Extinction Ratio	Min.	dB	17	15
Isolation @ 1060 ± 5nm	Min.	dB	13	11
Signal Channel		nm	1060 ± 5	
Insertion Loss	Max.	dB	0.5	0.7
Polarization Extinction Ratio	Min.	dB	17	15
Isolation @ 980 ± 5nm	Min.	dB	13	11
Operating Power	Max.	W	2	
Operating Temperature		°C	-40 to +85	
Storage Temperature		°C	-50 to +85	
Package Type		mm	Φ3 x 76: for bare fiber Φ3 x 92: for 0.9mm loose tube 100 x 18 x 7.5: for 3mm cable	




Features / Benefits

- Low excess loss
- High extinction ratio
- High power handling
- Telcordia GR-1221 compliant test

Applications

- PM fiber EDFAs
- Monitoring in Coherent system
- Fiber lasers

Ordering Information

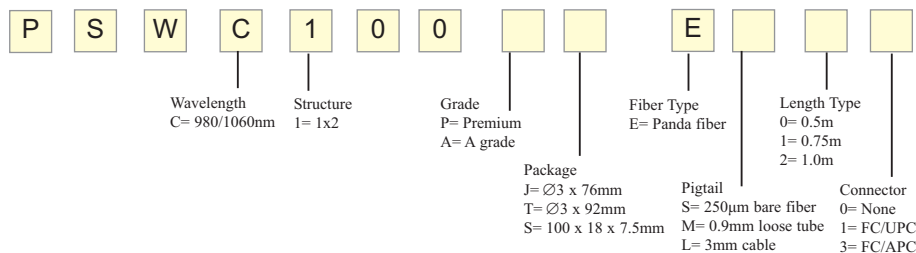

This product information is subject to change without notice.