

# 1x2 1310/1550nm Fused PM Fiber Standard WDM



## Specifications

Parameter		Unit	Premium	A grade
1310nm Channel		nm	1300 to 1320	
Insertion Loss	Max.	dB	0.3	0.5
Polarization Extinction Ratio	Min.	dB	18	16
Isolation @ 1540 to 1560nm	Min.	dB	16	14
1550nm Channel		nm	1540 to 1560	
Insertion Loss	Max.	dB	0.3	0.5
Polarization Extinction Ratio	Min.	dB	18	16
Isolation @ 1300 to 1320nm	Min.	dB	16	14
Operating Power	Max.	W	2	
Operating Temperature		°C	-40 to +85	
Storage Temperature		°C	-50 to +85	
Package Type		mm	Φ3 x 54: for bare fiber Φ3 x 70: for 0.9mm loose tube 90 x 20 x 10: for 3mm cable	


## Features / Benefits

- Low excess loss
- High extinction ratio
- High power handling
- Available for slow or fast axis operation
- Telcordia GR-1221 compliant test

## Applications

- Instrument
- Coherent communication system
- Testing system

## Ordering Information

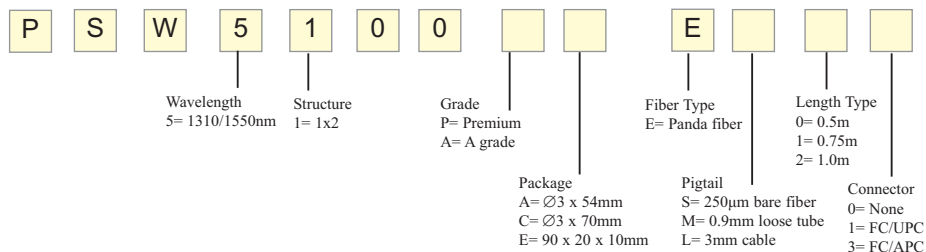

This product information is subject to change without notice.